


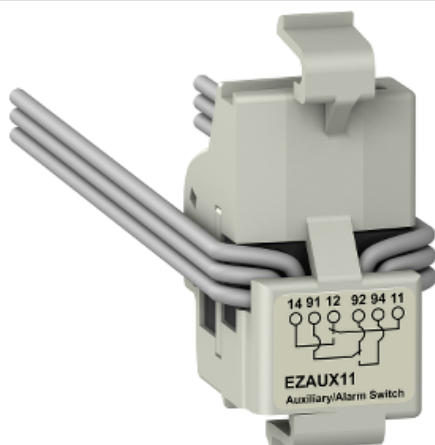

## Main

|                             |                     |
|-----------------------------|---------------------|
| Range of product            | EZC100              |
| Range                       | EasyPact            |
| Device short name           | AL<br>AX            |
| Product or component type   | Switch              |
| Device application          | Signalling<br>Alarm |
| Signal contacts composition | 2 NO/NC             |

## Complementary

|                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|----------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Auxiliary contacts type                                  | Standard                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| [I <sub>th</sub> ] conventional free air thermal current | 5 A                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| [I <sub>e</sub> ] rated operational current              | DC-12 : 2.5 A DC 48 V<br>AC-15 : 2 A AC 50/60 Hz 250 V<br>DC-12 : 0.2 A DC 250 V<br>DC-14 : 0.2 A DC 250 V<br>AC-12 : 3 A AC 50/60 Hz 250 V<br>AC-15 : 5 A AC 50/60 Hz 48 V<br>DC-14 : 1 A DC 48 V<br>DC-12 : 0.4 A DC 125 V<br>AC-12 : 5 A AC 50/60 Hz 24 V<br>DC-12 : 4 A DC 24 V<br>AC-12 : 5 A AC 50/60 Hz 48 V<br>AC-15 : 5 A AC 50/60 Hz 24 V<br>AC-12 : 5 A AC 50/60 Hz 125 V<br>DC-14 : 0.4 A DC 125 V<br>DC-14 : 3 A DC 24 V<br>AC-15 : 3 A AC 50/60 Hz 125 V |
| Minimum load                                             | 10 mA at 24 V                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Auxiliary connection terminal                            | Lead wire                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

## Contractual warranty

|                 |           |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|